



Product Specifications


MS-800

- Product Category: 800w Single Output Power Supply
- Version number: ztao3.0
- Release date: 1st May 2025

Product Overview

MS-800-XX SERIES PRODUCTS FOR A 800W CHASSIS-TYPE INDUSTRIAL POWER SUPPLY, THE OUTPUT VOLTAGE INCLUDING 24V/36V/48V, ETC., CAN BE ADAPTED TO DIFFERENT LOAD APPLICATION REQUIREMENTS TO MEET THE NEEDS OF MOST INDUSTRIAL APPLICATIONS, FAN COOLING, AS WELL AS A FULL RANGE OF PROTECTION, TO ENSURE THAT THIS SERIES OF PRODUCTS OF HIGH RELIABILITY AND HIGH STABILITY.

Model encoding

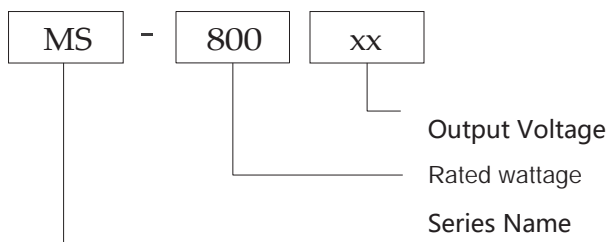

product characteristics

- The AC range input is switched via the switch
- Type of protection: short circuit/overload/overvoltage
- fan cooling
- led indicator for Power on
- 100% full load burn-in test
- 3-year warranty

Areas of Application



Industrial control, mechanical and electrical, electronic instruments, industrial automation, electronic equipment, semiconductor equipment, etc. (except information technology equipment)



electrical specifications

| Model | | MS-800-24 | MS-800-36 | MS-800-48 |
|-------------|--|--|------------|-----------------------------|
| Output | DC output voltage | 24V | 36V | 48V |
| | Rated current | 33A | 22A | 16.5A |
| | Current range | 0~33A | 0~22A | 0~16.5A |
| | Rated power | 792W | 792W | 792W |
| | Ripple & Noise (Max) | 300mVp-p | 360mVp-p | 360mVp-p |
| | voltage adjustment range | 21.6~26.4V | 32.4~39.6V | 43.2~52.8V |
| | voltage accuracy | ±2% | ±2% | ±2% |
| | Linear adjustment rate | ±1% | ±1% | ±1% |
| | Load Adjustment Ratio | ±1% | ±1% | ±1% |
| | start-up & rise time | 1500ms,60ms/230VAC 1800ms,70ms/115VAC (at full load) | | |
| | Holding time | 15mS/230VAC 10mS/115VAC (at full load) | | |
| Input | Input Voltage | 100~132 VAC/195~264VAC SELECTABLE BY SWITCH | | 273~370VDC(switc on 230VAC) |
| | Input frequency | 50~60HZ | | |
| | Efficiency | 87% | 88% | 89% |
| | Input current | 9.5A/115VAC 5.0A/230VAC | | |
| | Leakage current | < 2mA/240VAC | | |
| Protection | overload protection | 105~135% of rated power Protection mode: +vo down to undervoltage point, automatic recovery after removal of abnormal conditions | | |
| | Overvoltage protection | 28.8~33.6V | 41.4~48.6V | 55.2~64.8V |
| | Over temperature | Turn off the output voltage, reboot to restore | | |
| Function | Fan On/Off Control (Typ.) | TH3 ≥ 50 °C FAN ON, ≤ 40 °C FAN OFF | | |
| Environment | Operating temperature | -20°C ~+65°C | | |
| | Operating humidity | 20~90%rh No condensation | | |
| | Storage temperature/humidity | -40~+80°C 10~95%rh, no condensation | | |
| Security | Resistant to vibration pressure resistance | 10~500HZ, 5G 10 MIN/CYCLE, X, Y, Z 60 MIN EACH Input to output :1.5kvac; Input to ground :1.5kvac; Output to ground :500vac | | |
| | Insulation impedance | Input to Output, Input to Ground, Output to Ground :100 Ohms/500VDC/25°C /70%RH | | |
| Others | Product dimensions | 215*115*50mm (L*W*H) | | |
| | Packaging | 1.4kg/pcs | | |
| Remarks | | <ol style="list-style-type: none"> All parameters are measured at 230vac input, rated load and 25°C when not specified. Ripple and noise voltages were measured on a 20MHz bandwidth oscilloscope with 0.1μ and 47μ capacitors at the end of a 12-inch twisted pair cable, measured at 20MHZ bandwidth. Accuracy: Includes setting error, linear adjustment ratio and load adjustment ratio. Linear Adjustment Ratio Measurement Method: Test from low voltage to high voltage at rated load Load Adjustment Ratio Measurement Method: From 0% to 100% of rated load Start-up time is measured at cold start, fast and frequent switching on and off may increase the start-up time. When operating at altitudes higher than 2000 metres (6500ft): the operating environment needs to be reduced by 5°C / 1000 metres | | |

Outline and Mounting Dimensions (mm)

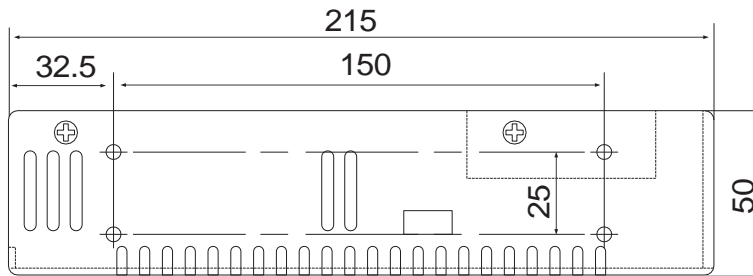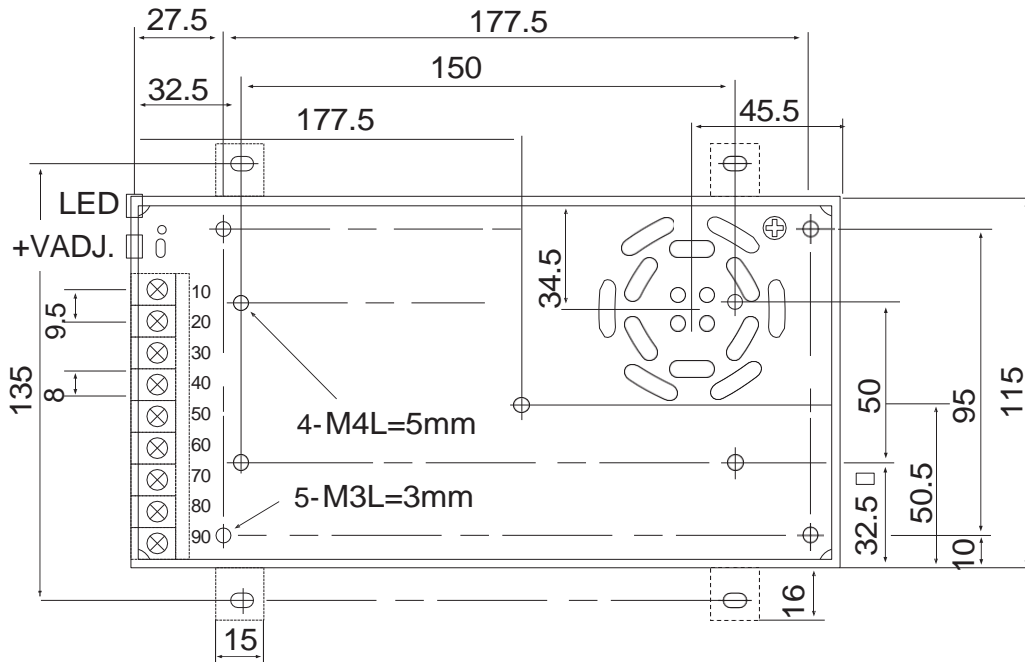

Terminal Pin No. Assignment

| pin No | Assignment |
|--------|--------------|
| 1 | AC/N(DC+) |
| 2 | AC/L(DC-) |
| 3 | FG (⊕) |
| 4,5,6 | DC OUTPUT -V |
| 7,8,9 | DC OUTPUT +V |


| Pinout | Function | |
|--------|-------------|---|
| L | AC LINE | Screw:m4*9.5 Torque:22Kgf.cn(2..... 2N.m) |
| N | AC NETURAL | |
| ⊕ | EARTH | |
| -Vo | DC output - | Screw:m4*9.5 Torque:22Kgf.cn(2..... 2N.m) |
| -Vo | DC output - | |
| -Vo | DC output - | |
| +Vo | DC output + | |
| +Vo | DC output + | |
| +Vo | DC output + | |

8-m4 Customer system mounting holes
mounting screws:m4
Installation torque: 8Kgf.cn (0.8N.m) screws into the housing is not more than 3mm


Remarks:
Unit: mm [inch]; unlabelled tolerance $\pm 0.5 [\pm 0.020]$.

Characteristic Curve

Input Voltage vs Output Load

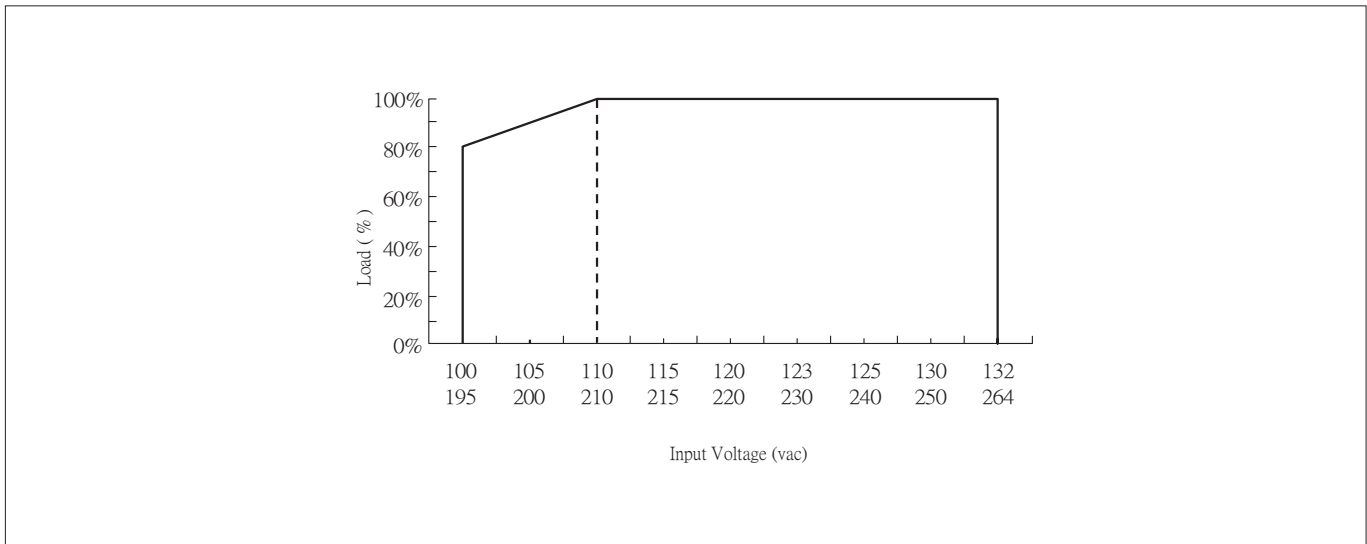

Ambient Temperature vs Output Load

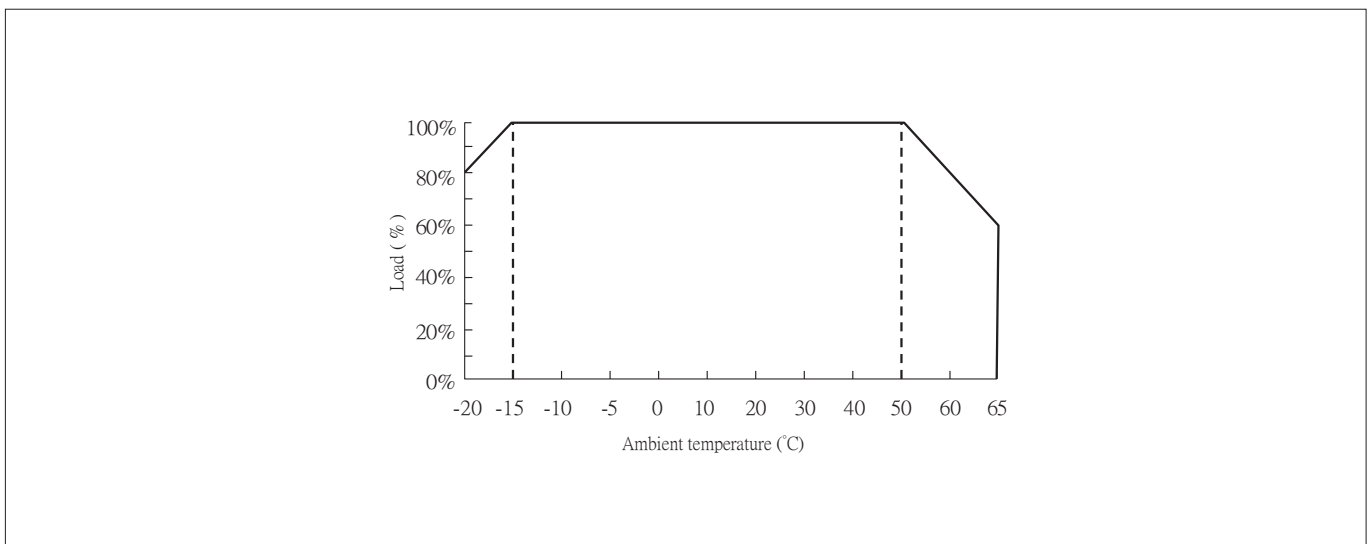

Remarks:

- 1.If you need to know more detailed test data, please contact our technical support to get the application notes of the corresponding products.
- 2.This product is suitable for use in a natural air convection environment, if used in a closed environment, please contact our technical support staff.