

DXS-3000


- Product Category: 3000W Single Output Digital Adjustable Power Supply
- Version No.: ZTAO3.0
- Release date: 1st May 2025



product overview

DXS-3000 is a dual-display adjustable constant voltage and constant current switching power supply, AC input range of 190~264VAC output voltage including 12V/36V/48V/60V/80V/110V/220V, etc., temperature control fan heat dissipation, DC output voltage throughout the 0V adjustable, DC output current throughout the 0A can be preset, output voltage and current can be customised to analogue signal 0-5V or 0-10V control, the product is suitable for motor speed control, lighting dimming, battery charging and so on. 0~10V control, the product is suitable for motor speed control, light dimming, battery charging and so on.

product naming

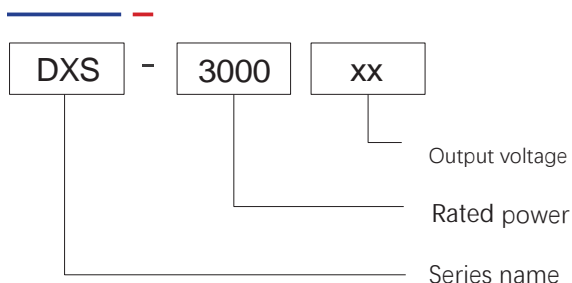

product characteristics

- AC input range 190~264VAC
- Type of protection: short circuit/overload/overvoltage
- fan cooling
- Power on LED indicator
- 100% full load burn-in test
- 3-year warranty





areas of application

Industrial control, mechanical and electrical, electronic instruments, industrial automation, electronic equipment, semiconductor equipment, etc. (except information technology equipment)

electrical specifications

Model		DXS-3000-12	DXS-3000-24	DXS-3000-36	DXS-3000-48	DXS-3000-60	DXS-3000-80	DXS-3000-110	DXS-3000-220
Output	DC output voltage	12V	24V	36V	48V	60V	80V	110V	220V
	Rated current	220A	125A	83.3A	62.5A	50A	37.5A	27.2A	13.6A
	Current range	0~220A	0~125A	0~83.3A	0~62.5A	0~50A	0~37.5A	0~27.2A	0~13.6A
	Rated power	2640W	3000W	2998.8W	3000W	3000W	3000W	2992W	2992W
	Ripple & Noise (Max)	200mVp-p	240mVp-p	320mVp-p	360mVp-p	500mVp-p	500mVp-p	850mVp-p	1000mVp-p
	voltage adjustment range	0~13.2V	0~26.4V	0~39.6V	0~52.8V	0~66V	0~88V	0~121V	0~230V
	voltage accuracy	±1%	±1%	±1%	±1%	±1%	±1%	±1%	±1%
	Linear adjustment rate	±1%	±1%	±1%	±1%	±1%	±1%	±1%	±1%
	Load Adjustment Ratio	±1%	±1%	±1%	±1%	±1%	±1%	±1%	±1%
	start-up & rise time	2000ms,75ms/230VAC (at full load)							
	Holding time	12ms/230VAC (at full load)							
Input	Input Voltage	190~264VAC 266~370VDC							
	Input frequency	50~60HZ							
	Efficiency	84%	88%	89%	89%	90%	90%	91%	91%
	Input current	23.6A/230VAC							
	Leakage current	< 3mA/240VAC							
Protection	overload protection	100~125% of rated power Protection mode: constant current limiting mode, restart to recover after abnormal conditions are removed							
	Over temperature	Turn off the output voltage, reboot to restore							
Function	Fan On/Off Control (Typ.)	TH3 ≥ 50 °C fan on, ≤ 40 °C fan off							
Environment	Operating temperature	-20°C ~+60°C							
	Operating humidity	20~90%RH No condensation							
	Storage temperature/humidity	-40~+80°C 10~95%RH, no condensation							
Security	Vibration-resistant	10~500HZ, 5G 10 min/cycle, X, Y, Z 60 min each							
	pressure resistance	Input to Output :1.5KVAC; Input to Ground :1.5KVAC; Output to Ground :500VAC							
Others	Insulation impedance	Input to Output, Input to Ground, Output to Ground :100 Ohms/500VDC/25°C /70%RH							
	Product dimensions	285*185*70mm (L*W*H) 320*185*70mm(including terminal block)							
	Packaging	5kg/pcs							
	Remarks	1. All parameters are measured at 230VAC input, rated load and 25°C when not otherwise specified. 2. Ripple and noise voltages were measured on a 20MHz bandwidth oscilloscope with 0.1μ and 47μ capacitors at the end of a 12-inch twisted pair cable, measured at 20MHz bandwidth. 3. Accuracy: Includes setting error, linear adjustment ratio and load adjustment ratio. 4. Linear Adjustment Ratio Measurement Method: Test from low voltage to high voltage at rated load 5. Load Adjustment Ratio Measurement Method: From 0% to 100% of rated load 6. Start-up time is measured at cold start, fast and frequent switching on and off may increase the start-up time. 7. When operating at altitudes higher than 2000 metres (6500ft): the operating environment needs to be reduced by 5°C / 1000 metres							

Outline and Mounting Dimensions (mm)

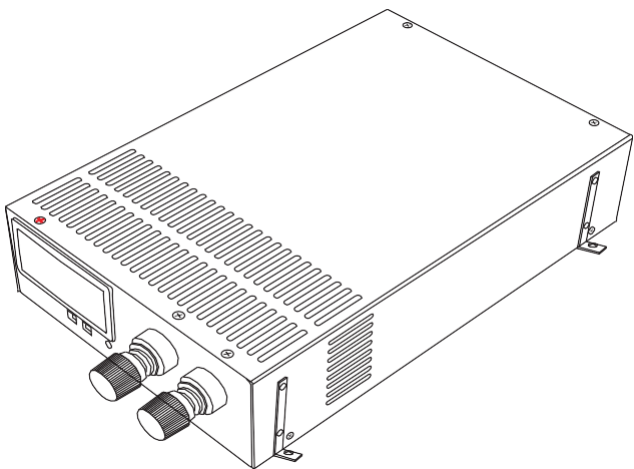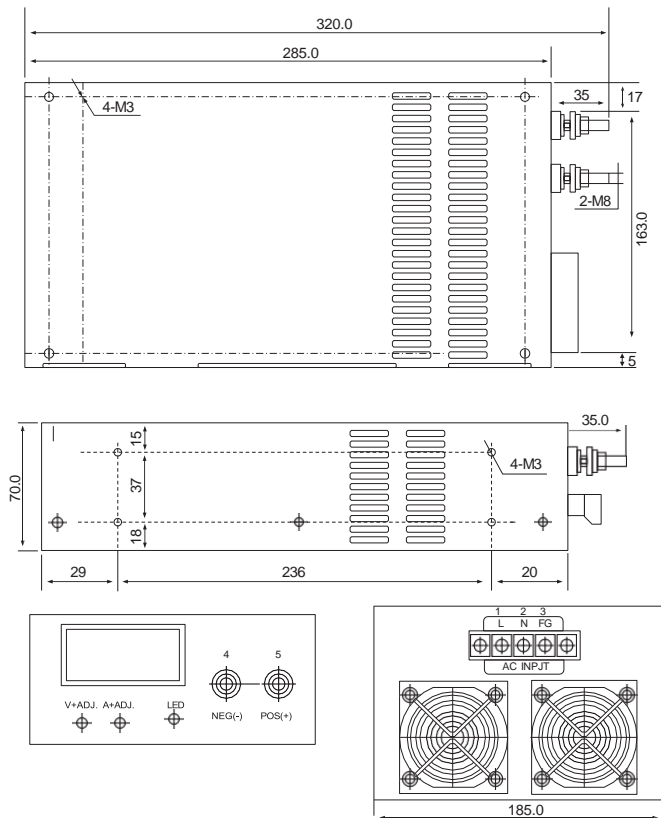

Terminal Pin No. Assignment

pin number	Assignment
1	AC/N(DC+)
2	AC/L(DC-)
3	FG \oplus
4	DC OUTPUT -V
5	DC OUTPUT +V


Pinout	Function	
L	AC LINE	Screw:M4*10 Torque:22Kgf.cn(2..... 2N.m)
N	AC NETURAL	
\oplus	EARTH	
NEG(-)	DC output -	Screw:M8*12 Torque:22Kgf.cn(2..... 2N.m)
POS(+)	DC output +	

8-M4 Customer system
mounting holes
mounting screws: M4
Installation torque: 8Kgf.cn
(0.8N.m) screws into the housing
is not more than 3mm


Remarks:
Unit: mm [inch]; unlabelled tolerance ± 0.5 [± 0.020].

Characteristic Curve

Input Voltage VS Output Load

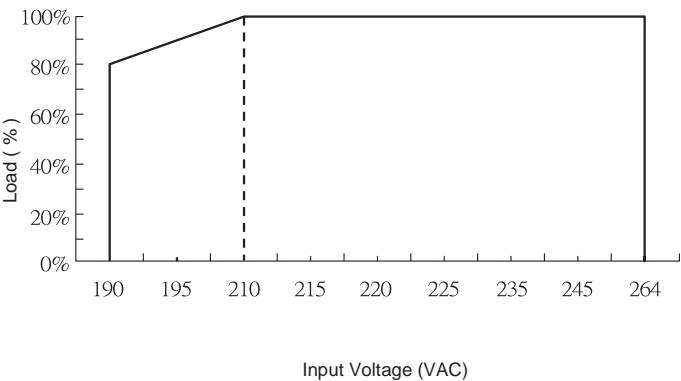

Ambient Temperature VS Output Load

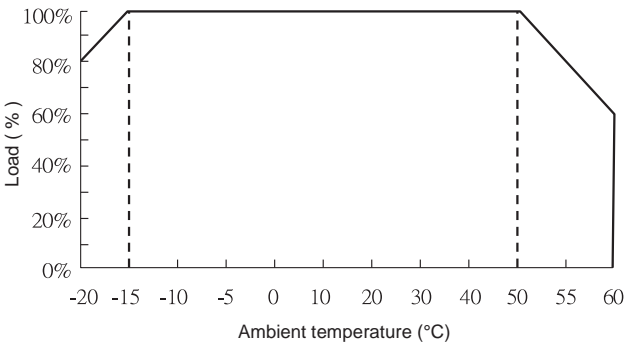

Remarks:
1.If you need to know more detailed test data, please contact our technical support to get the application notes of the corresponding products.
2.This product is suitable for use in a natural air convection environment, if used in a closed environment, please contact our technical support staff.