




# LPV-1200

- Product Category: 1200W Waterproof Power Supply
- Version Number: ZTAO3.0
- Release Date: May 1st, 2025

## Product Overview

The LPV-1200W series is a waterproof AC-to-DC LED driver power supply designed for constant voltage and constant power output. It features an AC input voltage range of 180~264VAC and offers 12V, 24V, 36V, and 48V output options. It boasts a high conversion efficiency of up to 94% and employs self-cooling technology. It features a gold-plated casing and an IP67 high protection rating.

### Model encoding

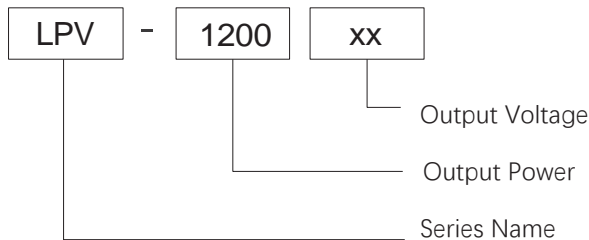

## Product Features

- 180~264VAC AC input range
- constant voltage and constant power mode
- IP67 protection rating
- Protection Types: Short Circuit / Overload / Overvoltage / Overtemperature
- Natural Air Cooling
- Suitable for Dry, Humid, and Rainy Environments
- 100% Full Load Burn-in Test
- 3-Year Warranty




## Application Areas

Street Lighting, Wall Washers, Courtyard Lights, Fishing Lights, Floodlights, Building Lighting, Plant Lighting, Electronic Instruments and Devices, etc. (excluding information technology equipment)

Electrical Specifications

Model	LPV-1200-24	LPV-1200-36	LPV-1200-45	LPV-1200-48	LPV-1200-60	
Output	DC Output Voltage	24V	36V	45V	48V	60V
	Rated Current	45A	33A	26.6A	25A	20A
	Current Range	0~45A	0~33A	0~26.6A	0~25A	0~20A
	Rated Power	1080W	1188W	1197W	1200W	1200W
	Ripple & Noise (Max)	240mVp-p	300mVp-p	350mVp-p	350mVp-p	400mVp-p
	Voltage Accuracy	±2%	±2%	±2%	±2%	±2%
	Linearity Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	Load Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
	Start-up & Rise Time	500ms, 50ms/230VAC (at full load)				
	Hold Time	24ms/230VAC (at full load)				
Input	Input Voltage	180~264VAC selectable via switch		245~370VDC(switc on 230VAC)		
	Input Frequency	50~60HZ				
	Efficiency	92.8%	93.5%	94%	94.3%	94.5%
	Input Current	11A/230VAC				
	Power Factor	0.5~0.7				
	Leakage Current	< 3mA/240VAC				
Protection	Overload Protection	90~105% Overcurrent Limitation of Rated Power, Automatic Recovery After Abnormal Conditions Are Removed Protection Mode: Current Limiting Mode, Automatic Recovery After Abnormal Conditions Are Removed				
	Overvoltage Protection	Overvoltage protection activated at 115%~135% of rated output voltage Protection mode: voltage limiting mode, automatically recovers after abnormal conditions are removed				
	Over-temperature protection	105°C±10°C (JK1/JK2 tested on transformer side/Mos tube surface) Protection mode: voltage limiting mode, automatically recovers after temperature drops				
Environment	Operating temperature	-20°C ~+60°C (Please refer to the load derating curve)				
	Operating humidity	20~90%RH non-condensing				
	Storage temperature / humidity	-40~+80°C 10~95%RH, non-condensing				
	Vibration resistance	10~500HZ, 5G 10 minutes / Cycle, X, Y, Z each 60 minutes				
Safety	Withstand voltage	Input to output: 1.5KVAC; Input to ground: 1.5KVAC; Output to ground: 500VAC				
	Insulation resistance	Input to output, input to ground, output to ground: 100 Ohms/500VDC/25°C/70%RH				
Other	Product dimensions	320*120*56mm (L*W*H)				
	Packaging	2.75kg/6pcs/17.5Kg/0.033 cubic meters				
Remarks	1. All parameters, unless otherwise specified, are measured under 230VAC voltage input, rated load, and 25°C conditions. 2. Ripple and noise voltage were measured on a 20MHz bandwidth oscilloscope with 0.1μ and 47μ capacitors added to the ends of a 12-inch twisted pair cable, measured at a 20MHz bandwidth. 3. Accuracy: Includes setting error, line regulation, and load regulation. 4. Linear regulation measurement method: Test from low voltage to high voltage under rated load 5. Load regulation measurement method: From 0% to 100% rated load 6. Startup time is measured under cold start conditions. Rapid and frequent power-on and power-off may increase startup time.					

Dimensions and Mounting (mm)

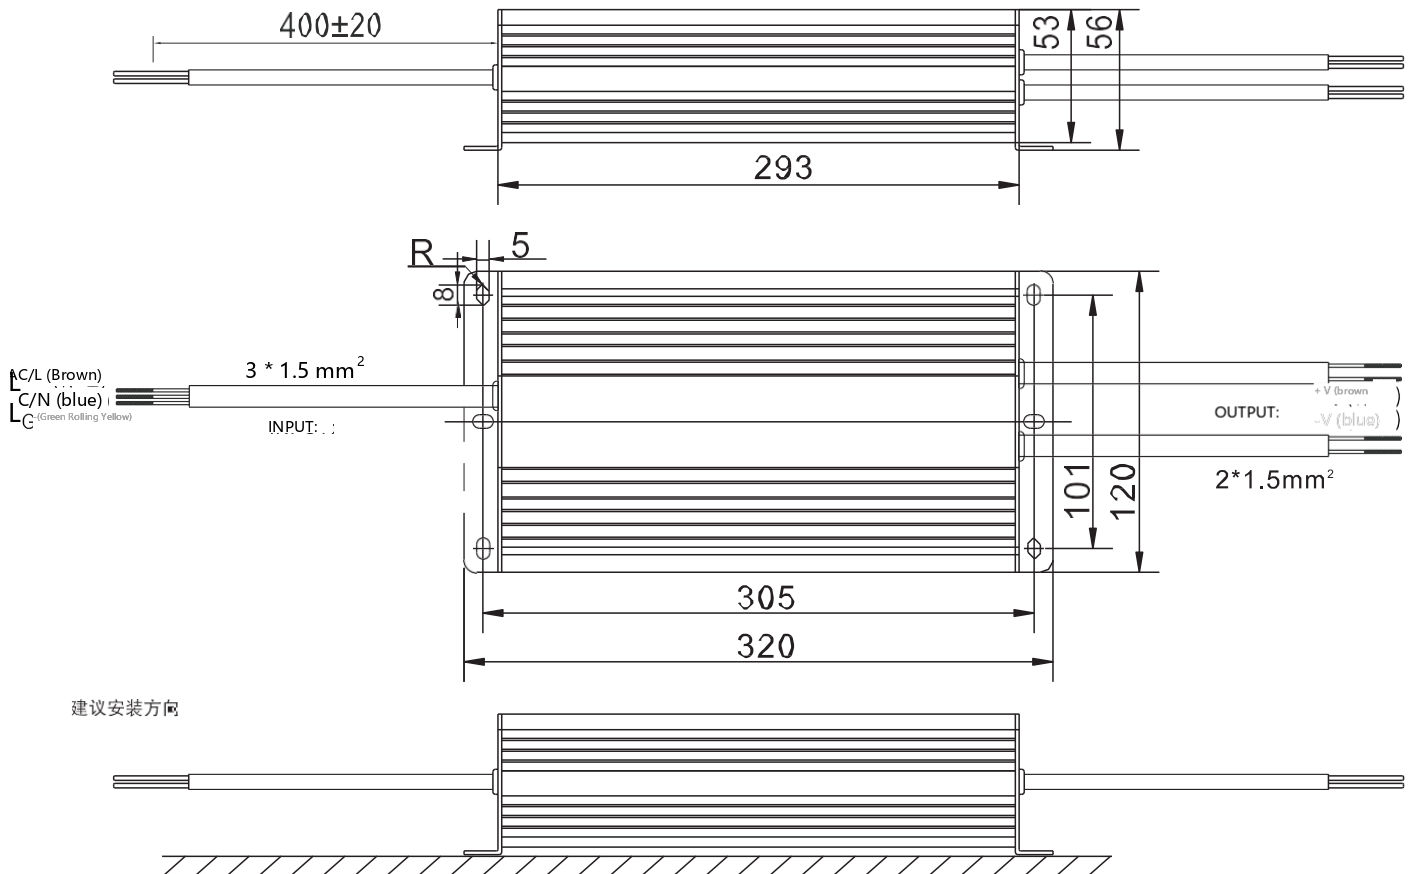

Pins	Function
L	AC LINE
N	AC NETURAL
⊕	EARTH
-V	DC output -
-V	DC output -
+V	DC output +
+V	DC output +

4-M4 Customer System Mounting Hole  
 Screws: M4  
 Mounting Torque: 8Kgf.cm (0.8Nm)

Remarks:


Unit: mm [inch]; Unspecified tolerance is ±0.5 [±0.020]

Terminal Pin No. Assignment


Input (black three core)		Output (black two core)	
Brown	AC/L	Brown	DC OUTPUT +V
Blue	AC/N	Blue	DC OUTPUT -V
Green & yellow	⊕ : Ground		

## Characteristic Curve

Input Voltage VS Output Load

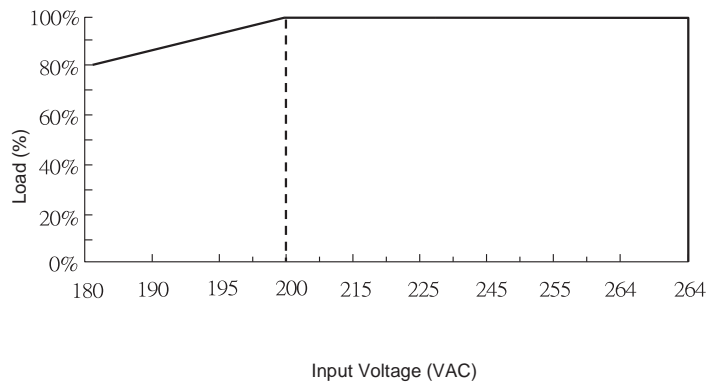

Ambient Temperature VS Output Load

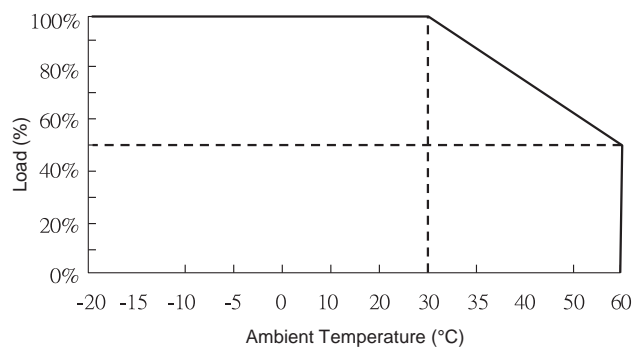

- Note:
1. For more detailed test data, please contact our technical support to obtain the application notes for the corresponding product.
  2. This product is suitable for use in natural air convection environments. For use in enclosed environments, please contact our technical support personnel.