


ZTG-2000

- Product Category: 2000W Single Output
- Power Supply Version Number: ZTAO3.0
- Release date: 1st May 2025

product overview

ZTG-2000-XX series of products for a 2000W chassis-type industrial power supply, the output voltage includes 12V/24V/36V/48V/72V/110V/220V, etc., can be adapted to different load application requirements to meet the needs of most industrial applications, built-in multi-functions such as output voltage, output current, remote on/off control, auxiliary power supply and other functions to provide a variety of design flexibility, fan heat dissipation, as well as a full range of protections, to ensure that this series of products of high reliability and high stability.

Model encoding

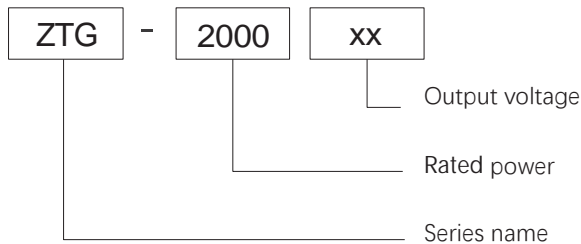

product characteristics

- AC input range 180~264VAC
- Type of protection: short circuit/overload/over temperature
- remote on/off control
- fan cooling
- Power start LED indicator
- 100% full load burn-in test
- 3-year warranty







areas of application

Industrial control, mechanical and electrical, electronic instruments, industrial automation, electronic equipment, UV curing equipment, semiconductor equipment, etc. (except information technology equipment)

electrical specifications

| Model | | ZTG-2000-12 | ZTG-2000-24 | ZTG-2000-36 | ZTG-2000-48 | ZTG-2000-72 | ZTG-2000-110 | ZTG-2000-220 | |
|-------------|---|--|-------------|-------------|-------------|-------------|--------------|--------------|--|
| Output | DC output voltage | 12V | 24V | 36V | 48V | 72V | 110V | 220V | |
| | Rated current | 166A | 83.3A | 55.5A | 41.7A | 27.8A | 18.2A | 9.1A | |
| | Current range | 0~166A | 0~83.3A | 0~55.5A | 0~41.7A | 0~27.8A | 0~18.2A | 0~9.1A | |
| | Rated power | 1992W | 1999.2W | 1998W | 2001.6W | 2001.6W | 2002W | 2002W | |
| | Ripple & Noise (Max) | 200mVp-p | 200mVp-p | 260mVp-p | 350mVp-p | 500mVp-p | 850mVp-p | 1000mVp-p | |
| | Output Voltage Adjustment | 0~15V | 0~26.4V | 0~39.6V | 0~52.8V | 0~79.2V | 0~121V | 0~242V | |
| | voltage accuracy | ±1% | ±1% | ±1% | ±1% | ±1% | ±1% | ±1% | |
| | Linear adjustment rate | ±1% | ±1% | ±1% | ±1% | ±1% | ±1% | ±1% | |
| | Load Adjustment Ratio | ±1% | ±1% | ±1% | ±1% | ±1% | ±1% | ±1% | |
| | start-up & rise time | 1800ms,150ms/230VAC (at full load) | | | | | | | |
| Input | Input Voltage | 180~264VAC | | | | | | | |
| | Input frequency | 45~65HZ | | | | | | | |
| | Efficiency | 85% | 86% | 87% | 89% | 90% | 90% | 91% | |
| | Input current | 20A/230VAC | | | | | | | |
| | Leakage current | < 3.0mA/240VAC | | | | | | | |
| Protection | short-circuit protected | Protection mode: constant current limitation, voltage lower than 10% of rated voltage, shutdown and output lockout after 1 second, restart to recover after abnormal conditions are removed | | | | | | | |
| | Over temperature | Output voltage is switched off and restored after temperature drop or reboot | | | | | | | |
| Function | constant current optimum range | 6~12V | 12~24V | 18~36V | 24~48V | 36~72V | 55~110V | 110~220V | |
| | External potentiometer | External potentiometer control (voltage, current) | | | | | | | |
| | analogue signal control | 0~5V/0~10V,0~5A/0~10A control (voltage, current) | | | | | | | |
| | Auxiliary power supply | 12V 0.5A | | | | | | | |
| | Remote on/off control | Default power on, high level power off (5~12V) | | | | | | | |
| | Fan On/Off Control (Typ.) | The fan's spinning straight up | | | | | | | |
| Environment | Operating temperature | -20°C ~+60°C | | | | | | | |
| | Operating humidity | 20~90%RH No condensation | | | | | | | |
| | Storage temperature/humidity | -40~+80°C 10~95%RH, no condensation | | | | | | | |
| Security | Vibration-resistant pressure resistance | 10~500HZ, 5G 10 min/cycle, X, Y, Z 60 min each | | | | | | | |
| | Insulation impedance | Input to Output :1.5KVAC; Input to Ground :1.5KVAC; Output to Ground :500VAC | | | | | | | |
| | Product dimensions | Input to Output, Input to Ground, Output to Ground :100 Ohms/500VDC/25°C /70%RH 275*155*70mm (L*W*H) | | | | | | | |
| Others | Packaging | 2.6kg/pcs | | | | | | | |
| | Remarks | <ol style="list-style-type: none"> All parameters are measured at 230VAC input, rated load and 25°C when not otherwise specified. Ripple and noise voltages were measured on a 20MHz bandwidth oscilloscope with 0.1μ and 47μ capacitors at the end of a 12-inch twisted pair cable, measured at 20MHz bandwidth. Accuracy: Includes setting error, linear adjustment ratio and load adjustment ratio. Linear Adjustment Ratio Measurement Method: Test from low voltage to high voltage at rated load Load Adjustment Ratio Measurement Method: From 0% to 100% of rated load Start-up time is measured at cold start, fast and frequent switching on and off may increase the start-up time. When operating at altitudes higher than 2000 metres (6500ft): the operating environment needs to be reduced by 5°C / 1000 metres | | | | | | | |

Outline and Mounting Dimensions (mm)

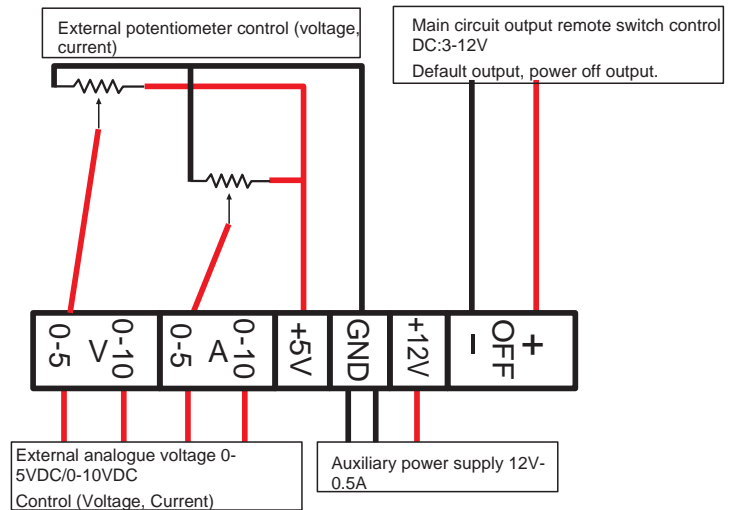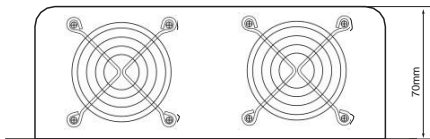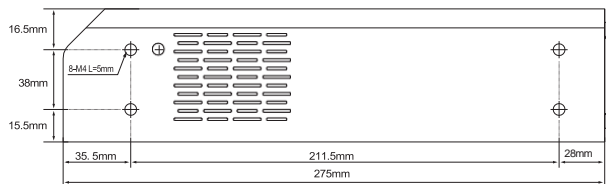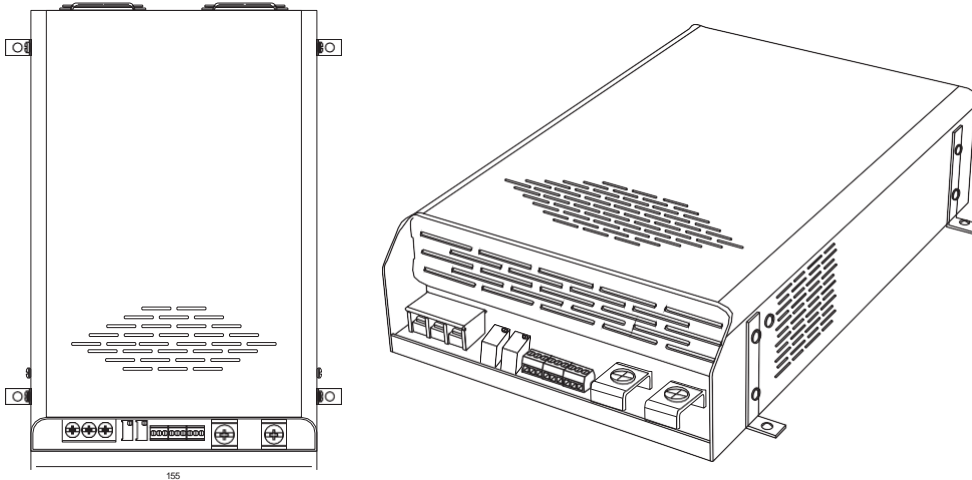

| Pinout | Function | |
|--------|-------------|--|
| L | AC LINE | Screw: M4*9.5 Torque: 22Kgf.cm (2.2N.m) |
| N | AC NETURAL | |
| ⊕ | EARTH | |
| -Vo | DC output - | Screw: M6*14 Torque: 30Kgf.cm (3.0N.m) |
| +Vo | DC output + | |
| | | |

8-M4 Customer system mounting holes

mounting screws: M4


Installation torque: 8Kgf.cm (0.8N.m) screws into the housing is not more than 3mm

Remarks:


Unit: mm [inch]; unlabelled tolerances are ± 0.5 [± 0.020].

Characteristic Curve

Input Voltage VS Output Load

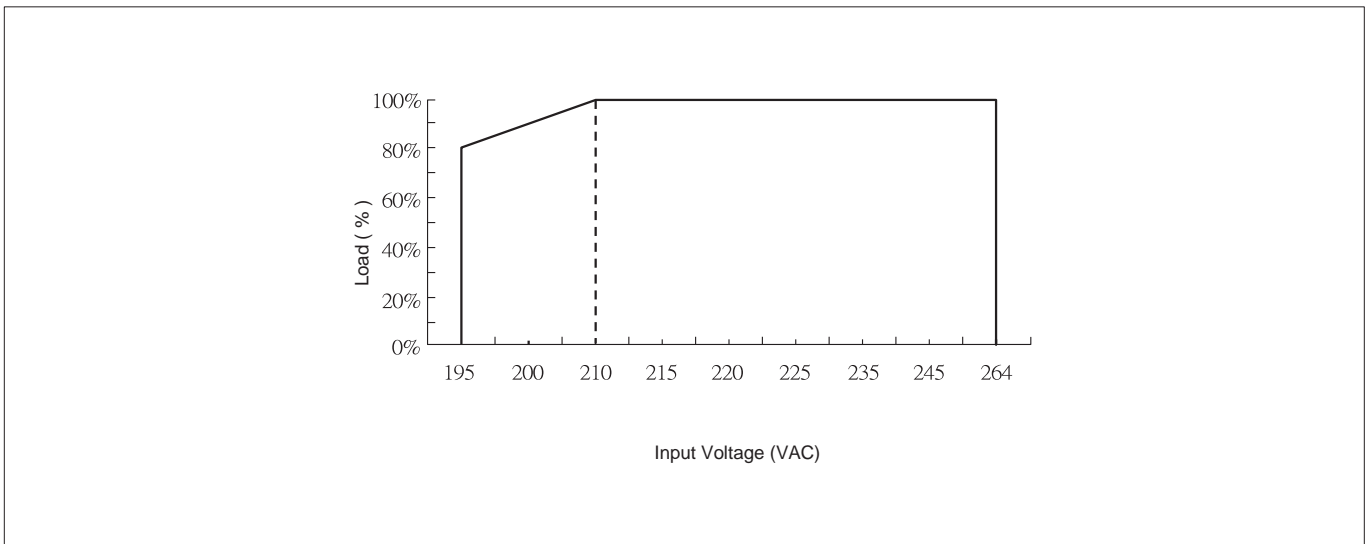

Ambient Temperature VS Output Load

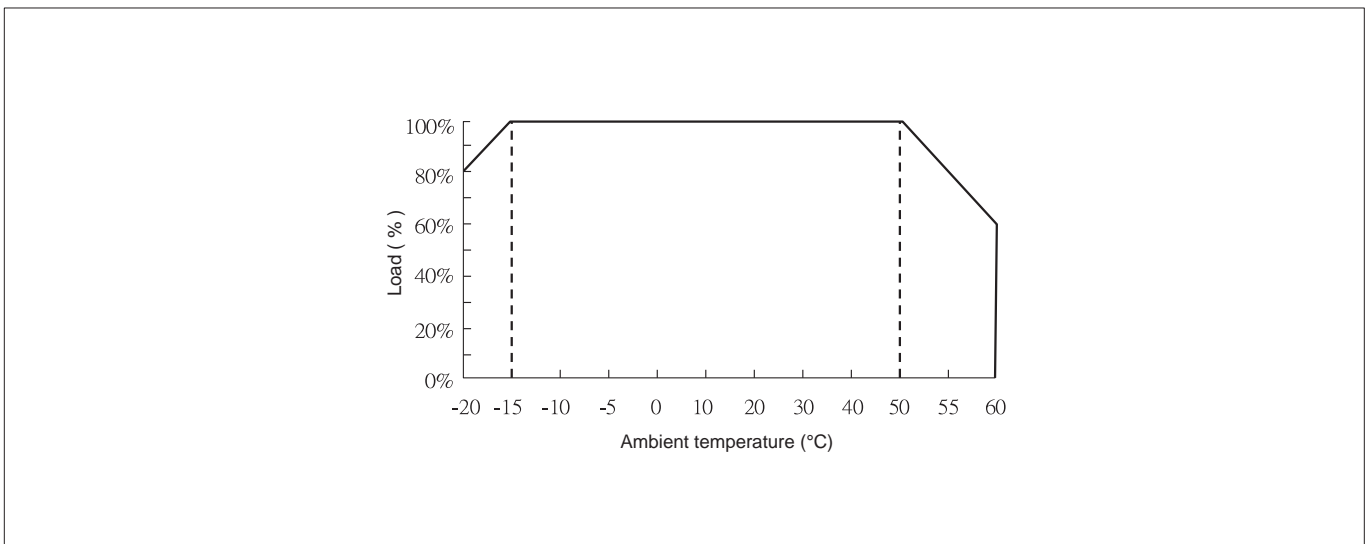

Remarks:

- 1.If you need to know more detailed test data, please contact our technical support to get the application notes of the corresponding products.
- 2.This product is suitable for use in a natural air convection environment, if used in a closed environment, please contact our technical support staff.