




DXS-800

- Product Category: 800W Single Output Digital Adjustable Power Supply
- Version No.: ZTAO3.0
- Release date: May 1st, 2025

product overview

DXS-800 is a dual-display adjustable voltage regulator switching power supply, AC input range 100~120/ 200~240V (switch replacement), global, output voltage including 12V/36V/48V/60 V/80V/110V/220V, etc., temperature-controlled fan cooling, DC output voltage throughout the 0V adjustable, DC output current through out the 0A can be preset, the output voltage and current can be customised an alogue signal 0~5 V or 0~10V control, the product is suitable for motor speed control, lighting dimming, battery charging and so on.

model encoding

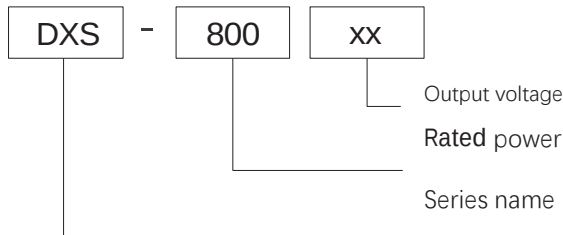

product characteristics

- AC input range 100~120/200~240V (switch replacement)
- Protection type: short circuit/overload/over temperature
- fan cooling
- Power on LED indicator
- 100% full load burn-in test
- 3-year warranty

areas of application



Industrial control, mechanical and electrical, electronic instruments, industrial automation, electronic equipment, UV curing equipment, semiconductor equipment, etc. (except information technology equipment)



electrical specifications

Model		DXS-800-24	DXS-800-36	DXS-800-48	DXS-800-60	DXS-800-80	DXS-800-110	DXS-800-220
Output	DC output voltage	24V	36V	48V	60V	80V	110V	220V
	Rated current	30A	20A	15A	12A	9A	6.6A	3.3A
	Current range	0~30A	0~20A	0~15A	0~12A	0~9A	0~6.6A	0~3.3A
	Rated power	720W	720W	720W	720W	720W	726W	726W
	Ripple & Noise (Max)	500mVp-p	650mVp-p	650mVp-p	900mVp-p	900mVp-p	1000mVp-p	1200mVp-p
	Output Voltage Adjustment	0~27V	0~38V	0~52V	0~79.2V	0~121V	0~121V	0~230V
	voltage accuracy	±1%	±1%	±1%	±1%	±1%	±1%	±1%
	Linear adjustment rate	±1%	±1%	±1%	±1%	±1%	±1%	±1%
	Load Adjustment Ratio	±1%	±1%	±1%	±1%	±1%	±1%	±1%
	start-up & rise time	1800ms,80ms/150VAC 1800ms,70ms/230VAC (at full load)						
Input	Input Voltage	100~132/200~264V (switch replacement) 280~370VDC						
	Input frequency	50~60HZ						
	Efficiency	88.5%	89%	89%	89%	90%	90%	91%
	Input current	12A/115VAC 6A/230VAC						
	Leakage current	< 3.0mA/240VAC						
Protection	short-circuit protected	Protection mode: constant current limitation, restart recovery after removal of abnormal conditions						
	Over temperature	Output voltage is switched off and restored after temperature drop or reboot						
Function	Customisable analogue signals	0~5V/0~10V,0~5A/0~10A control (voltage, current)						
	Fan On/Off Control (Typ.)	TH3 ≥ 50 °C fan on, ≤ 40 °C fan off						
Environment	Operating temperature	-20°C ~ +60°C						
	Operating humidity	20~90%RH No condensation						
	Storage temperature/humidity	-40~+80°C 10~95%RH, no condensation						
Security	Vibration-resistant	10~500HZ, 5G 10 min/cycle, X, Y, Z 60 min each						
	pressure resistance	Input to Output :1.5KVAC; Input to Ground :1.5KVAC; Output to Ground :500VAC						
	Insulation impedance	Input to Output, Input to Ground, Output to Ground :100 Ohms/500VDC/25°C /70%RH						
	Product dimensions	215*115*50mm (L*W*H)						
Others	Packaging	1.8kg/pcs						
	Remarks	1. All parameters are measured at 230VAC input, rated load and 25°C when not otherwise specified. 2. Ripple and noise voltages were measured on a 20MHz bandwidth oscilloscope with 0.1μ and 47μ capacitors at the end of a 12-inch twisted-pair cable with a 20M Hz bandwidth. 3. Accuracy: Includes setting error, linear adjustment ratio and load adjustment ratio. 4. Linear Adjustment Ratio Measurement Method: Test from low voltage to high voltage at rated load 5. Load Adjustment Ratio Measurement Method: From 0% to 100% of rated load 6. Start-up time is measured at cold start, fast and frequent switching on and off may increase the start-up time. 7. When operating at altitudes higher than 2000 metres (6500ft): the operating environment needs to be reduced by 5°C / 1000 metres						

Outline and Mounting Dimensions (mm)

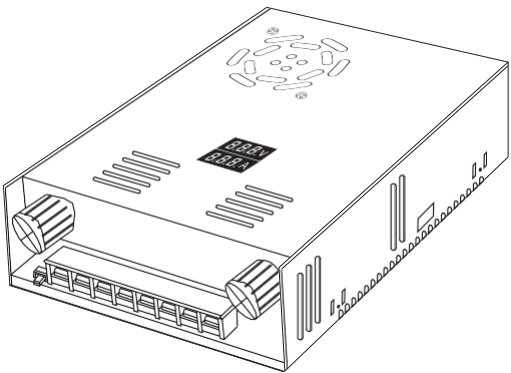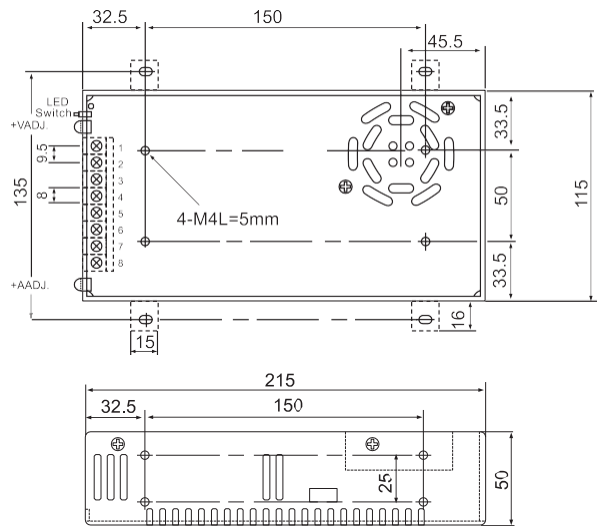

Terminal Pin No.Assignment

pin No	assignment
7	AC/N(DC+)
6	AC/L(DC-)
5	FG $\oplus$
4,3	DC OUTPUT -V
2,1	DC OUTPUT +V


Pinout	Function	
L	AC LINE	Screw:M4*10 Torque:22Kgf.cn(2.2N.m)
N	AC NETURAL	
$\oplus$	EARTH	
-V	DC output -	Screw:M4*10 Torque:22Kgf.cn(2.2N.m)
-V	DC output -	
+V	DC output +	
+V	DC output +	

8-M4 Customer system
mounting holes
mounting screws: M4
Installation torque: 8Kgf.cn
(0.8N.m) screws into the housing
is not more than 3mm


Remarks:
Unit: mm [inch]; unlabelled tolerance ± 0.5 [± 0.020].

characteristic curve

Input Voltage VS Output Load

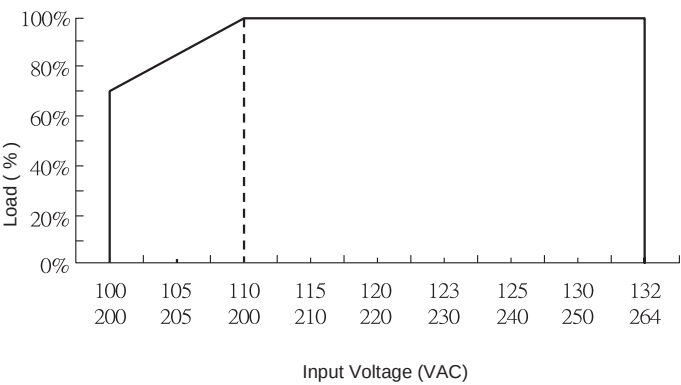

Ambient Temperature VS Output Load

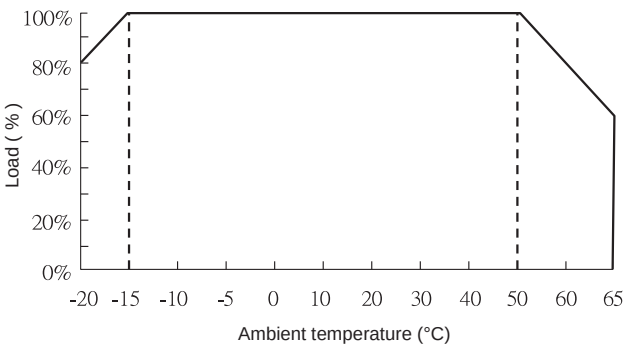

Remarks:

- 1.If you need to know more detailed test data, please contact our technical support to get the application notes of the corresponding products.
- 2.This product is suitable for use in a natural air convection environment, if used in a closed environment, please contact our technical support staff.